

VALUE FOR MONEY

SP-10 / SP-25

MAX DISCHARGE


48 m³/hour / 60 m³/hour

DISCHARGE SIZE

upto 2" / upto 2-1/2"

WEIGHT

22 / 32 kgs

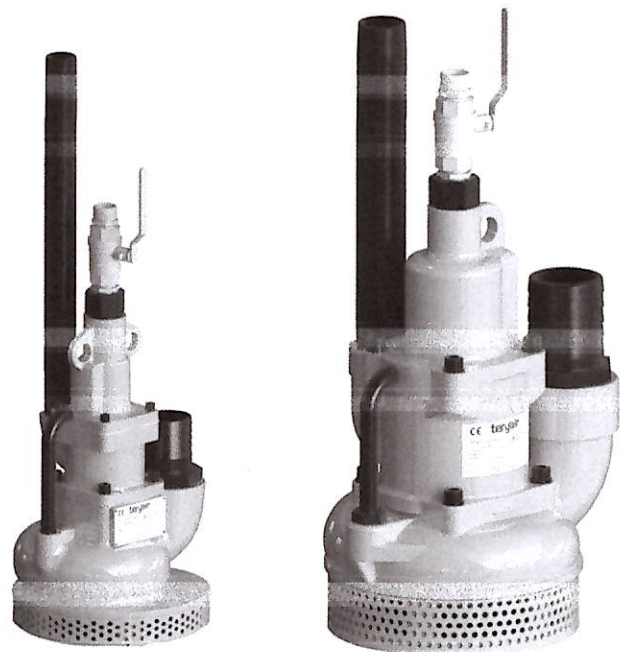

SP-10

SP-25

SUMP CENTRIFUGAL PUMP



Approvals and Certifications

metal pumps are CE marked and manufactured under an ISO 9001:2015 Quality system – SGS. Teryair metal pumps explosion proof Certification (ATEX) is under application and expected by September 2020



Versatility

This pump handles Viscous fluids, Slurries, Solid laden fluids, Shear Sensitive fluids very well.

No Priming needed

No Foaming of fluid pumped


No Stall damages

Portable


Submerged operation capable

Performance Graph

Head vs Discharge at 90 psi air supply pressure

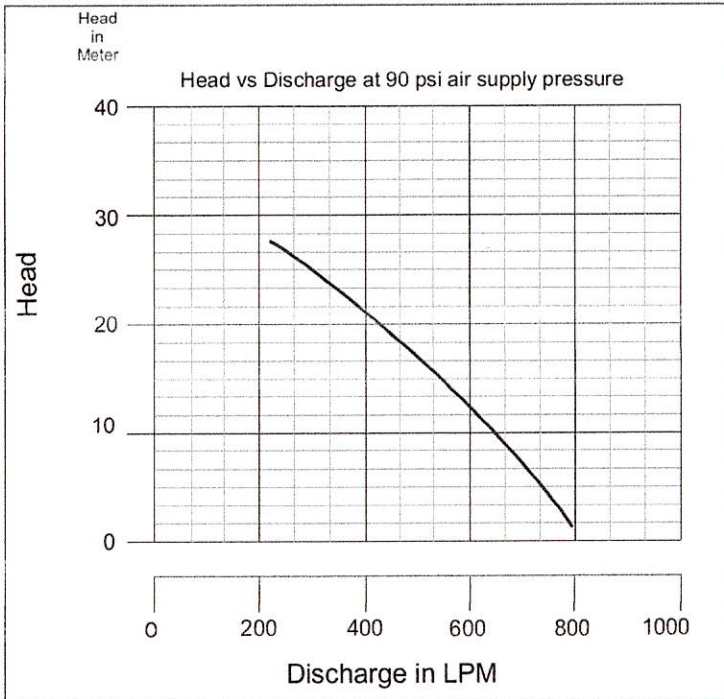

SP-10

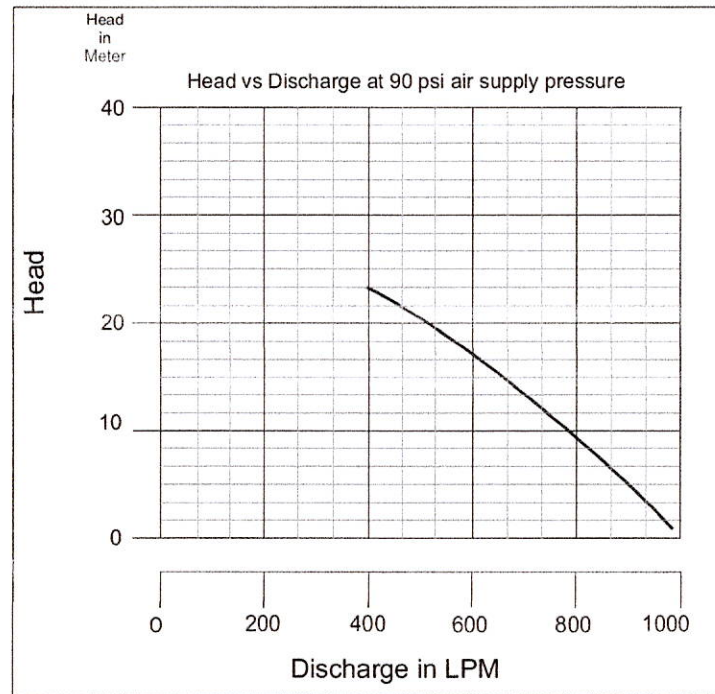

SP-25

Main Features

- Will pump down to 22mm will handle up to 3mm solids governor controlled motor compact design enables uses in restricted areas.
- Air inlet operated by gate valve lever.

Application Features

- Used in the Construction, De-watering and Engineering industry.
- Transfer of fluids, usage in sumps for periodic de watering.
- Marine- emptying ballast tanks, after washing procedure.
- Draining cargo holds during and after washing procedure.
- Pumping of sea water from bilges, holds, etc.

Technical Data

<i>IMPA Code</i>	59 16 35 / 59 16 36	59 16 37
<i>Capacity</i>		
- <i>Total Head</i>	27 meter	24 meter
- <i>Discharge</i>	48 m3/hour	60 m3/hour
<i>Max Air Consumption</i>	2.7 m3/min	3.5 m3/min
<i>Air Hose</i>	3/4" NPT	3/4" NPT
<i>Fluid Outlet</i>	2" Hose	2-1/2" Hose
<i>Weight</i>	22 kgs	32 kgs
<i>Min Opening Pump will enter</i>	204mm x 230mm	210mm x 305 mm